

TABLE OF CONTENTS

| DESCRIPTION | Page |
|---|-------|
| DESCRIPTION | 1 |
| CIRCUIT ANALYSIS | 1 |
| OUTLINE DIAGRAM (10 Volt Regulator/Control Board) | 2 |
| OUTLINE DIAGRAM (10 Volt Regulator/Control Component Board) | 2 |
| SCHEMATIC DIAGRAM (10 Volt Regulator/Control Board 19D417401G1) | 3 |
| SCHEMATIC DIAGRAM (10 Volt Regulator/Control Board 19D417401G2) | 4 |
| PARTS LIST | 5 - 6 |

DESCRIPTION

The 19D417401G1 10 Volt Regulator/Control Board is used in the MASTR® II Base Station Control Shelf. The 19D417401G2 board is used in the GE-MARC V Repeater Control Shelf. The board consists of a 10 Volt 1/2 Ampere regulator; A 10 Volt 2 Ampere regulator; A keying switch and a 20 dB pre-amplifier for local microphone operation.

CIRCUIT ANALYSIS

The 13.8 Volts DC from the station power supply low current filter is applied to terminal D5 of the regulator. This current is filtered by choke L1 and applied to the 10 Volt, 1/2 Amp hybrid regulator consisting of A1-Q1 and integrated circuit U1. This regulator feeds the receiver and transmitter oscillators, providing the close tolerance ($\pm 1\%$) required by these modules.

The 13.8 VDC input is also applied to the 10 Volt, 2 Amp regulator consisting of A3-Q1, Q3, Q4 and Zener diode VR1. When the output of the regulator starts to increase, Q4 conducts harder. Q3 conducts less, causing A3-Q1 to conduct less. This increases the voltage drop across A3, Q1, keeping the output voltage constant. Potentiometer R4 is used to set the base voltage of Q4 for the desired 10 Volt output. This regulator supplies the station exciter, the receiver control circuits and the station accessories.

Diodes CR2-CR5 form a PTT OR gate. Applying a ground to any one of the PTT inputs forward biases the diode connected to that input, turning on Q5. Conduction of Q5 operates Q6, applying ground to the antenna relay lead A10. This ground is also applied to the cathode of the Light Emitting Diode (LED) CR15 (TX LIGHT), turning the light. Pin 8 on the regulator hybrid U1 is also

grounded. Capacitor C6 (not present in G2) starts to charge. In 15 milliseconds C6 is charged to a voltage high enough to allow the time delay switch in U1 to turn on.

Operation of the time delay switch causes the transmitter oscillator control switch in U1 to turn on. +10 Volts is applied via pin 14 of U1 to the transmitter. ICOM(s), keying the transmitter. The 15 millisecond delay in the transmitter oscillator keying circuit allows the antenna relay to energize before RF is applied to the relay. When the PTT is released, CR6 delays the antenna relay from de-energizing until the RF is removed from the contacts.


When one of the PTT input leads is grounded, CR8 is also forward biased, turning on Q11. Conduction of Q11 operates Q1 and Q12, applying ground to the RX 1 MUTE and RX 2 MUTE leads. If REPEATER PTT (D3) is grounded, CR9 is forward biased, preventing Q12 from conducting to allow the normal repeater system to function.

When a local microphone is used with the station, the microphone audio is connected via B1 to the input of the MIC PRE-AMP, consisting of Q2, Q7, Q8 and Q9. The audio is amplified by Q7 and the amplified audio level is adjusted by MIC GAIN control R14. The audio is further amplified by Q2 and Q8 and applied to the source lead of FET Q9. Q10 is normally conducting, keeping the gate of Q9 grounded and preventing the audio from passing. When the LOCAL PTT switch is operated, CR7 is forward biased, turning off Q10. FET Q9 is now allowed to conduct, passing the local audio to the transmitter modulator.


Service switches provided on the Regulator include the TX DISABLE/INTERCOM switch S1 which ground the TX DISABLE path to permit the serviceman to use the intercom without keying the transmitter; the REMOTE PTT switch S2 which allows the adjustment of remote line levels by keying the REMOTE PTT path in remote control systems.

GENERAL ELECTRIC COMPANY • MOBILE COMMUNICATIONS DIVISION
WORLD HEADQUARTERS • LYNCHBURG, VIRGINIA 24502 U.S.A.

GENERAL  ELECTRIC*

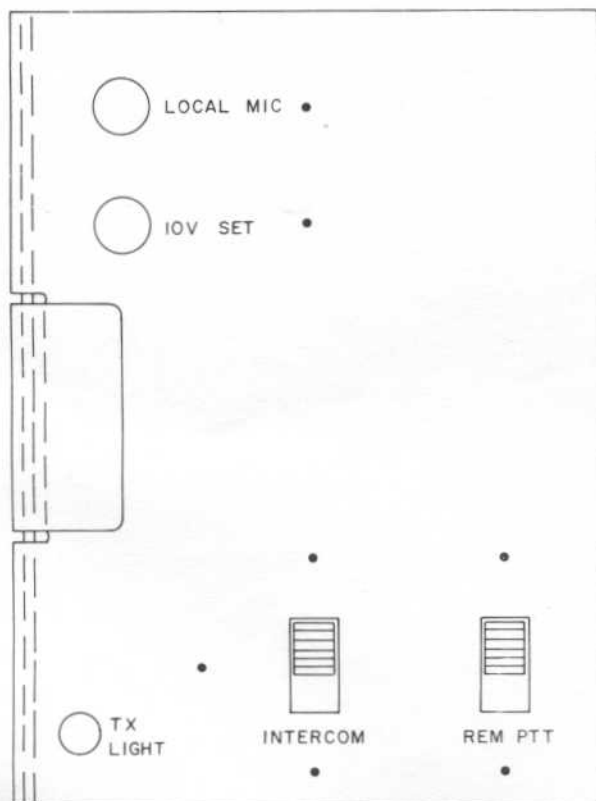

FRONT PANEL (A1)

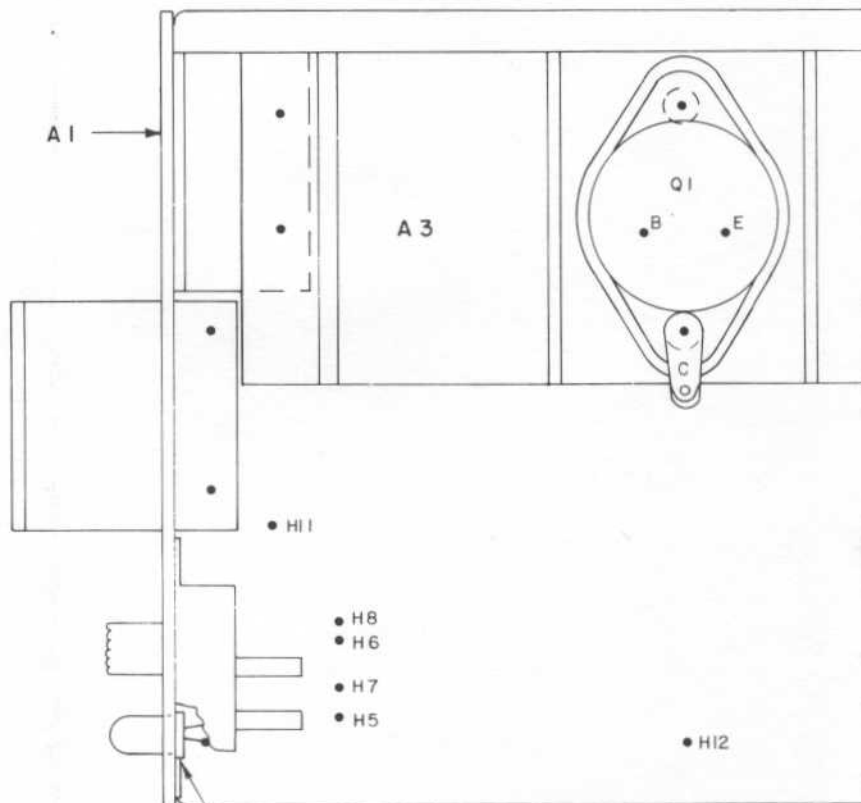

FLANGE OF DIODE MUST BE MOUNTED FLUSH AGAINST PANEL


REFER TO WIRING DIAGRAM FOR THE FOLLOWING CONNECTIONS.

| FROM | TO |
|---------|--------|
| A3-Q1-B | A2-H11 |
| A3-Q1-C | A2-H10 |
| A3-Q1-E | A2-H12 |
| A1-S1-3 | A2-H5 |
| A1-S1-2 | A2-H6 |
| A1-S2-3 | A2-H7 |
| A1-S2-2 | A2-H8 |

REFER TO WIRING DIAGRAM FOR THE FOLLOWING CONNECTIONS

| FROM | TO |
|------|----|
| H2 | H1 |
| H3 | H9 |

COMPONENT BOARD A2

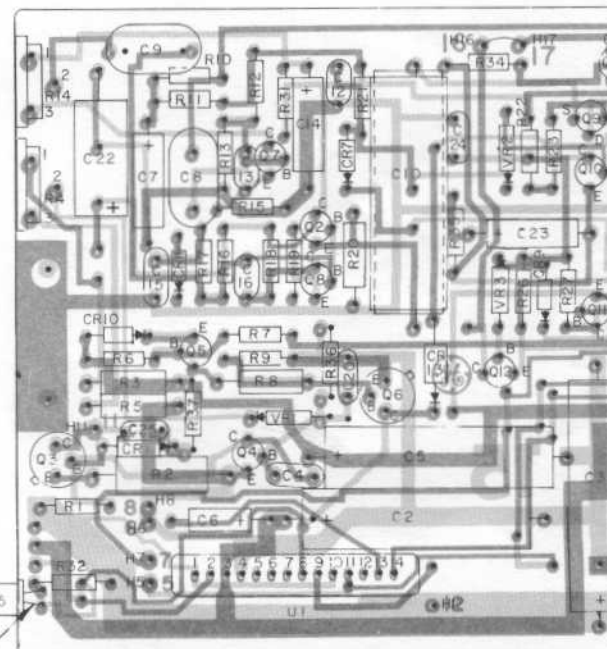


NOTCH OR FLAT DENOTES CATHODE LEAD


OUTLINE DIAGRAMS

10 VOLT REGULATOR/CONTROL BOARD
19D417401G1 & COMPONENT BOARD A2


SEE DETAIL "A"

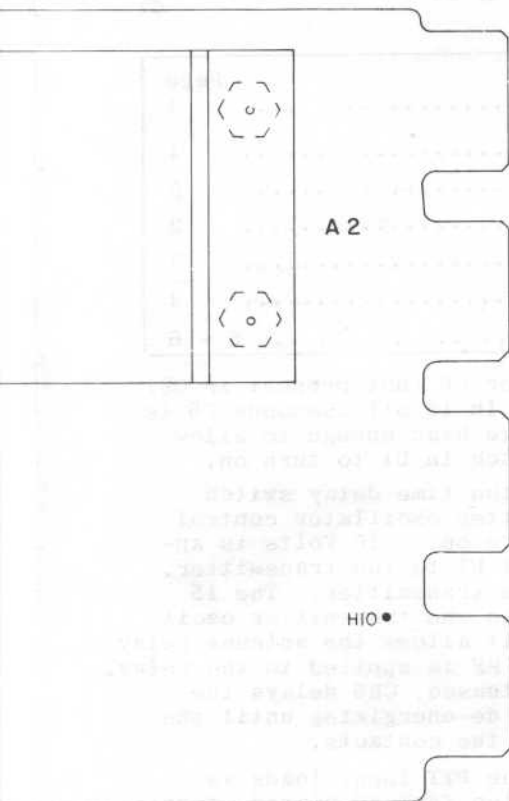


(19D423128, Rev. 0)

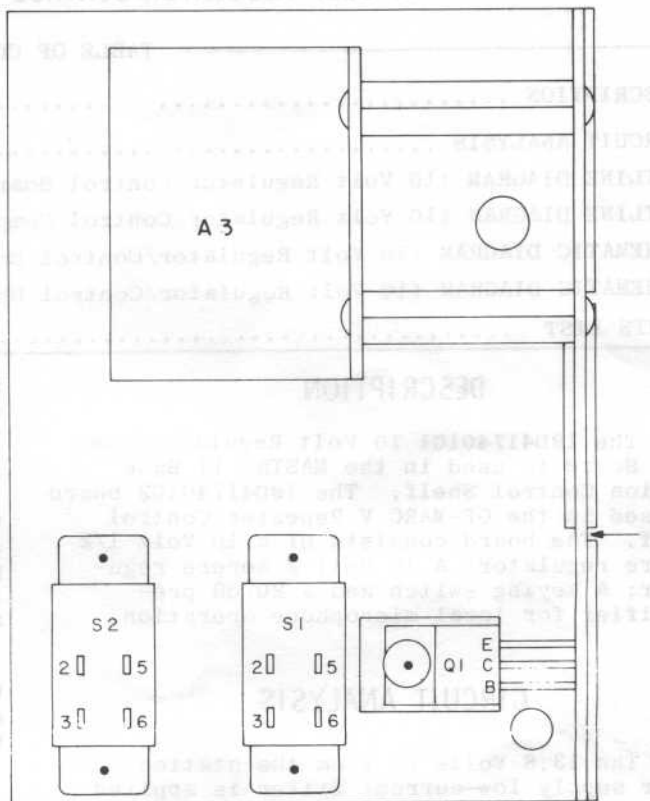

FRONT PANEL (A1)
REAR VIEW

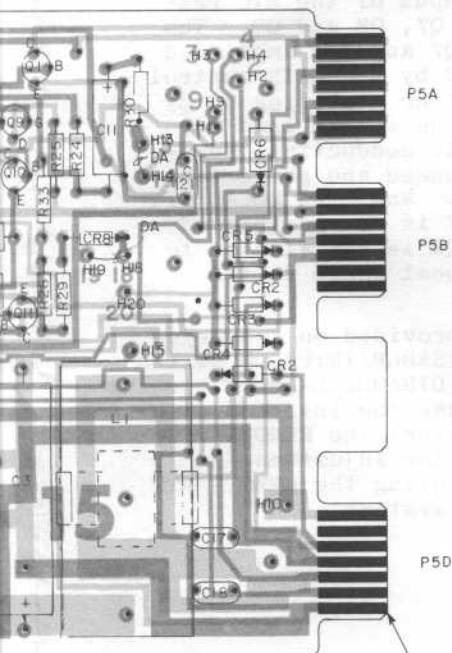

LEAD IDENTIFICATION
FOR Q1-Q2, Q4, Q10, Q12




NOTE: LEAD ARRANGEMENT, AND NOT CASE SHAPE, IS DETERMINING FACTOR FOR LEAD IDENTIFICATION.



DETAIL "A"


TYP. NUMBERING OF CONT. FINGERS

LEAD IDENTIFICATION
FOR Q3, Q5-Q8, Q11





NOTE: LEAD ARRANGEMENT, AND NOT CASE SHAPE, IS DETERMINING FACTOR FOR LEAD IDENTIFICATION.


LEAD IDENTIFICATION
FOR Q9



NOTE: LEAD ARRANGEMENT, AND NOT CASE SHAPE, IS DETERMINING FACTOR FOR LEAD IDENTIFICATION.




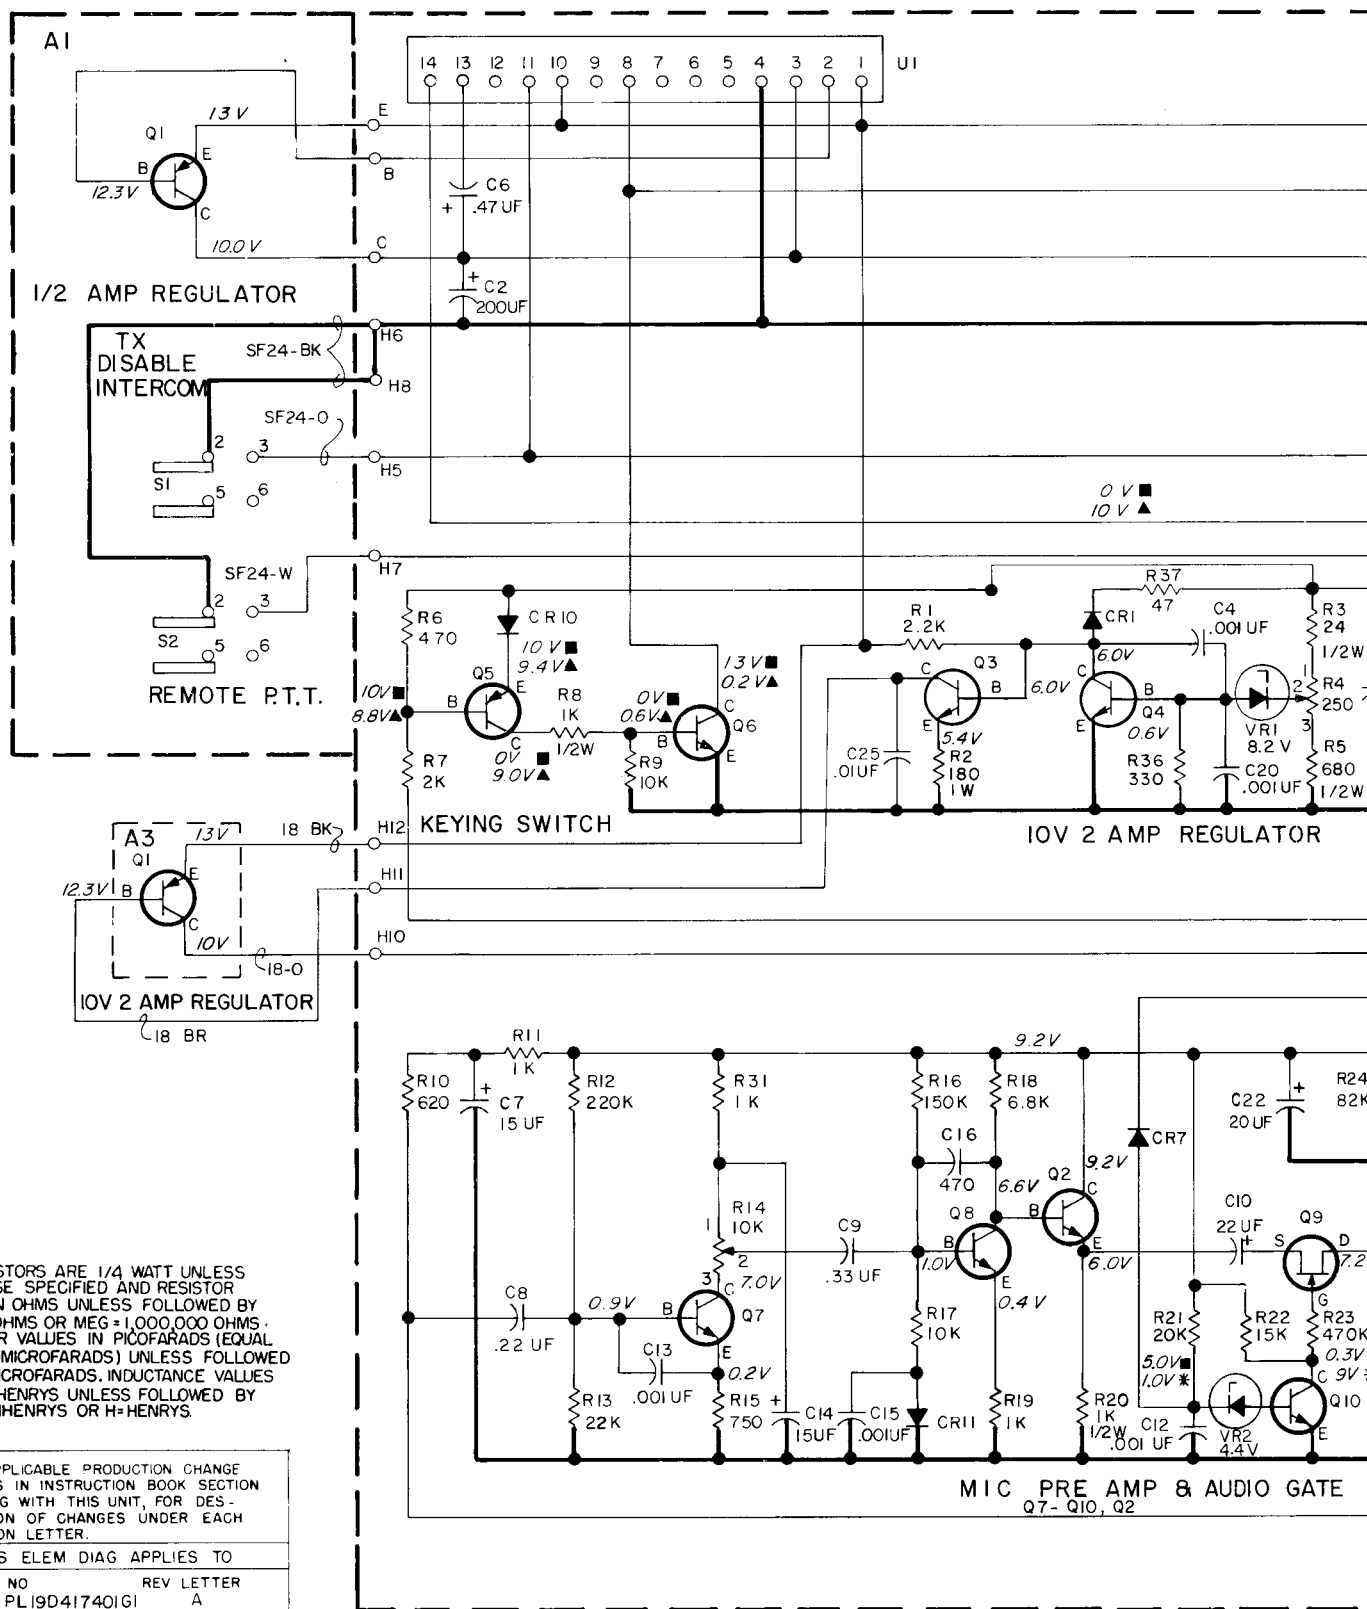

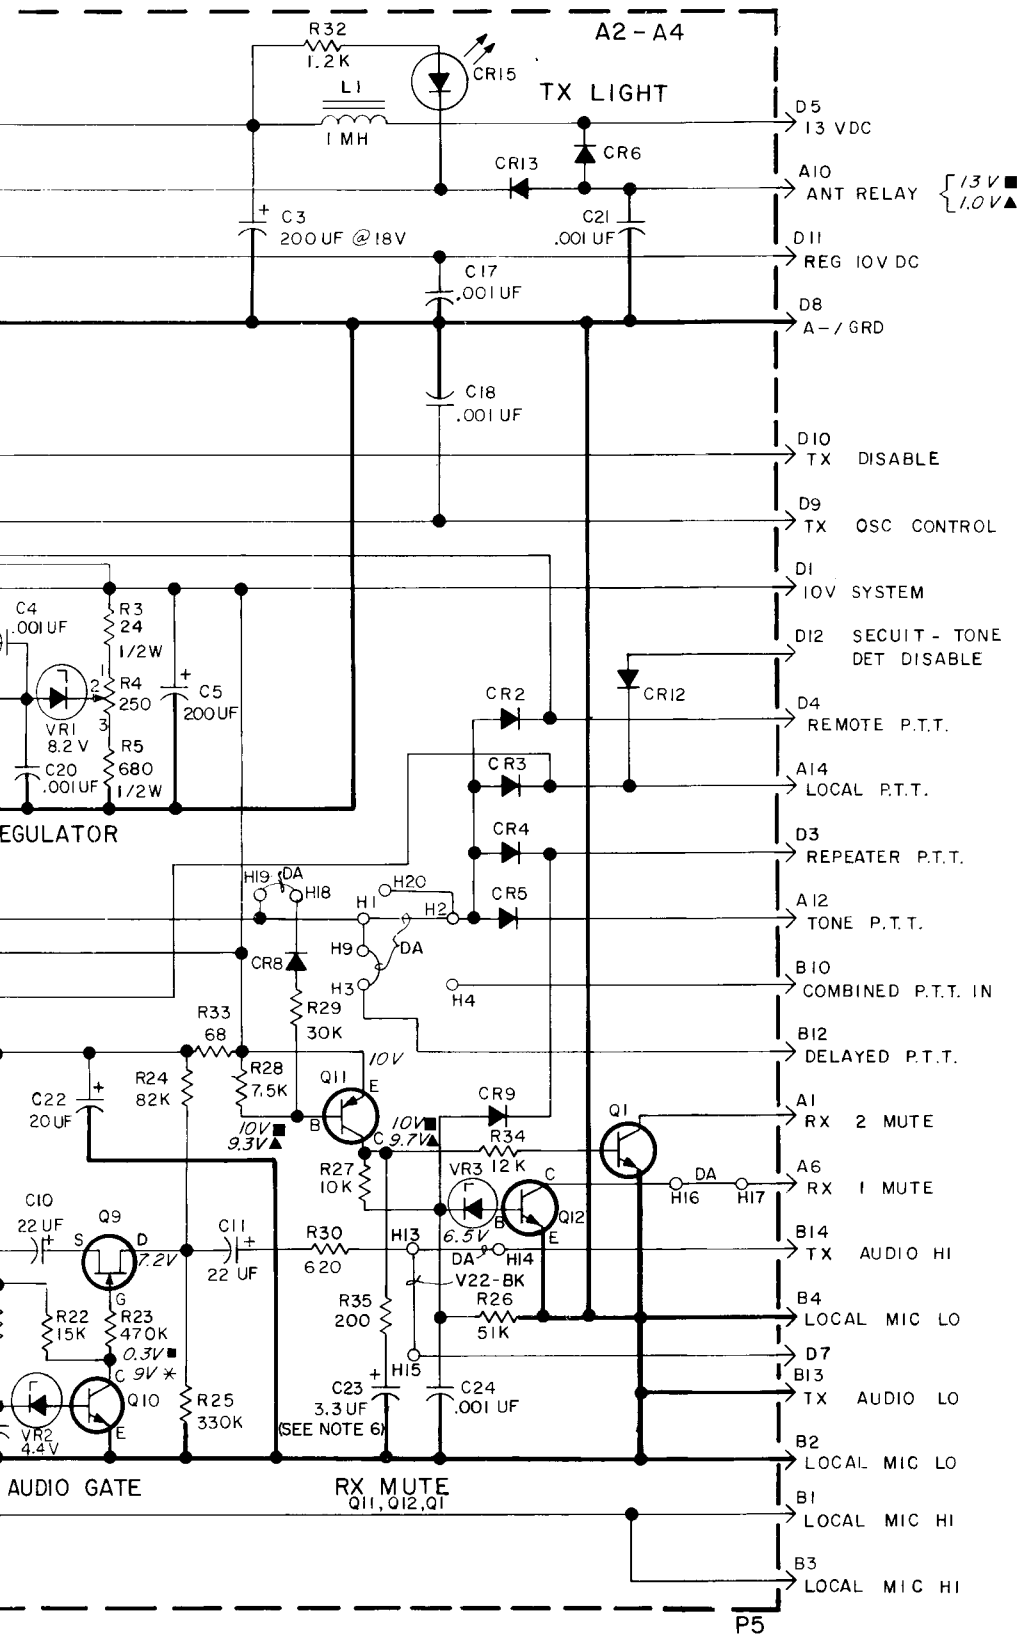

SCHEMATIC DIAGRAM


10 VOLT REGULATOR/CONTROL BOARD
19D417401G1

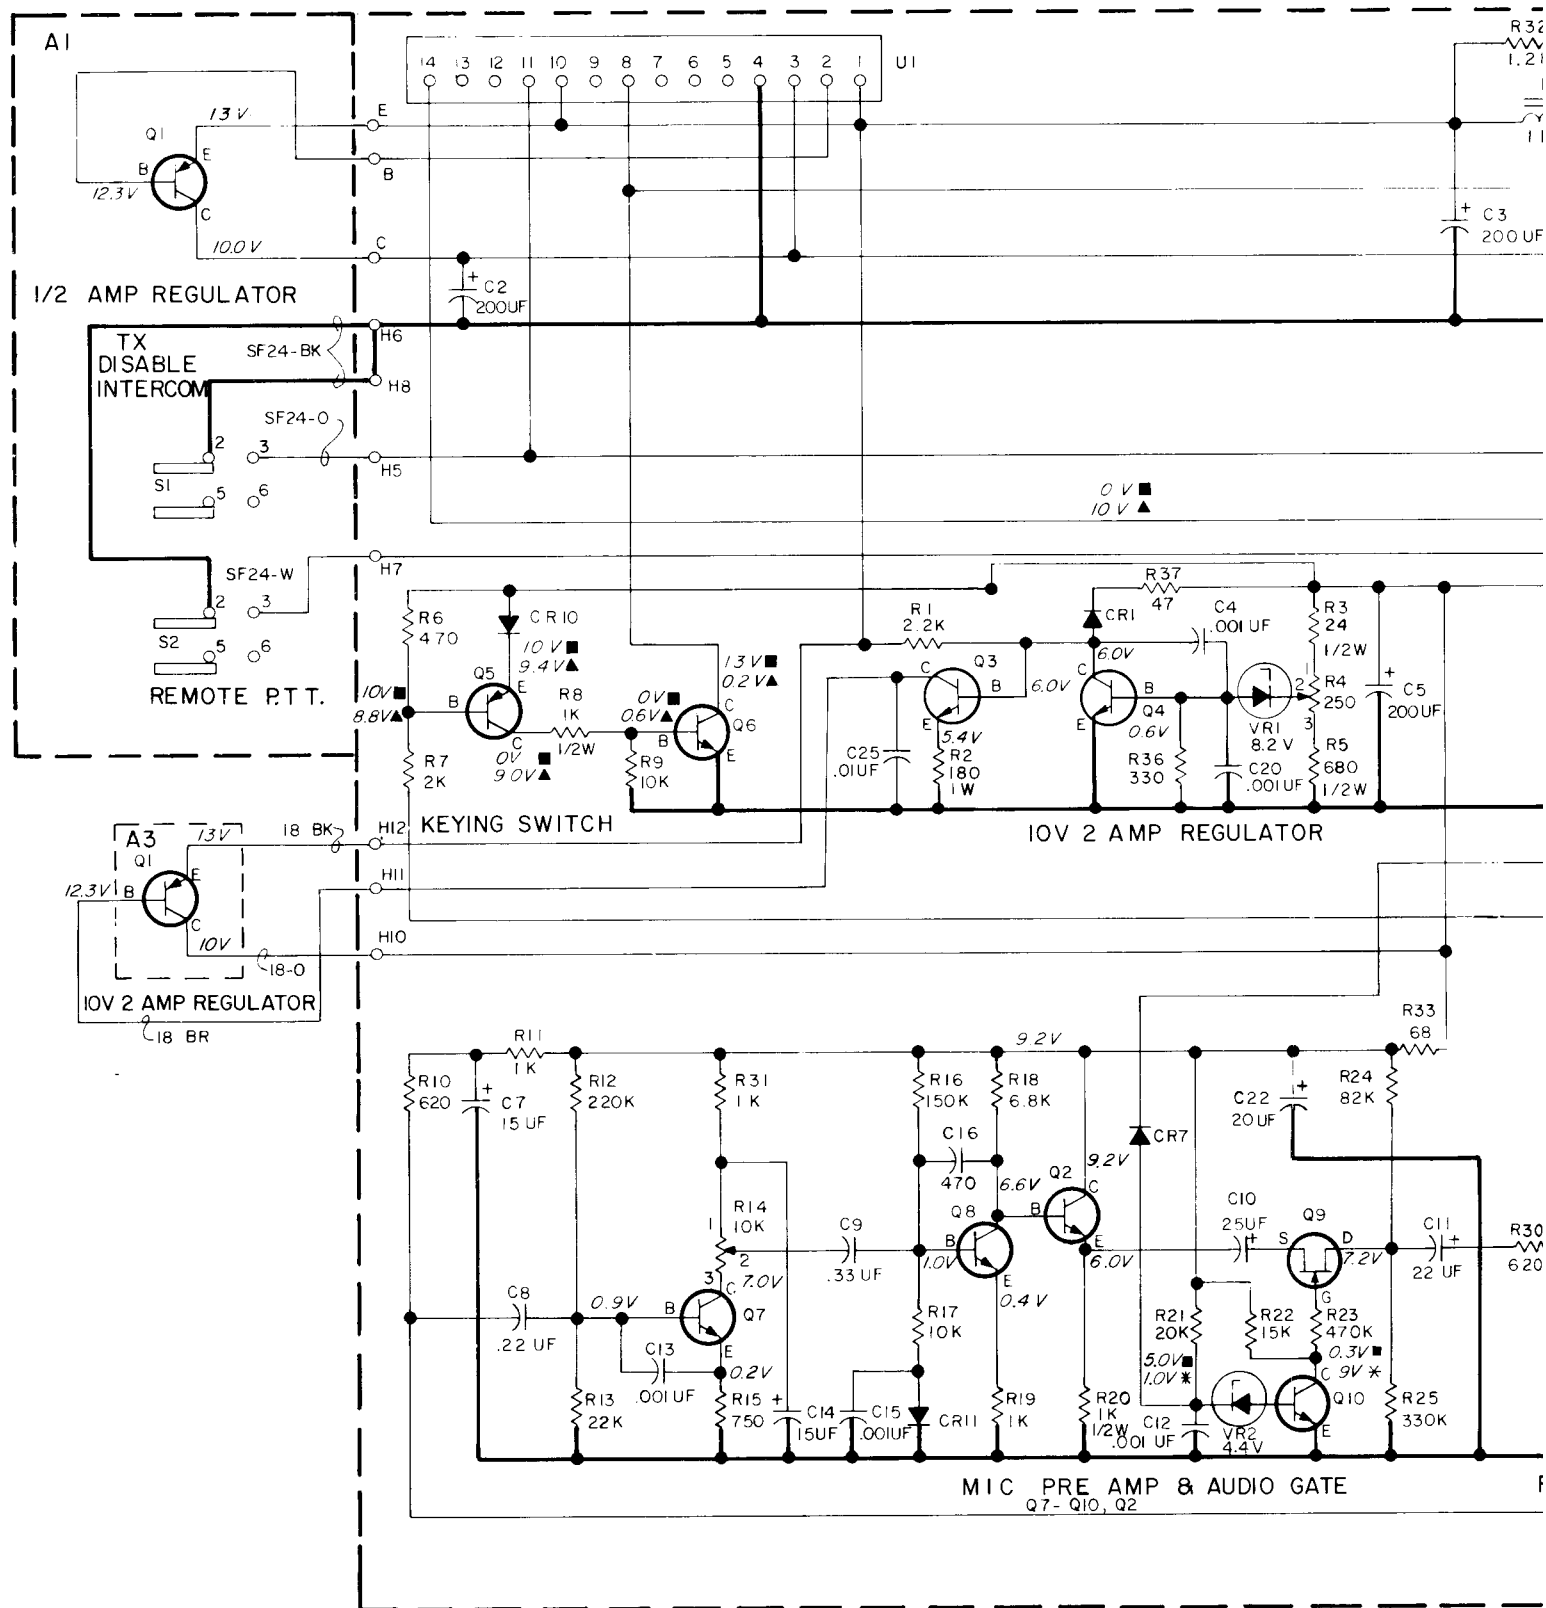

SCHEMATIC DIAGRAM

10 VOLT REGULATOR/CONTROL
19D417401G2

(19D430958, Rev. 4)

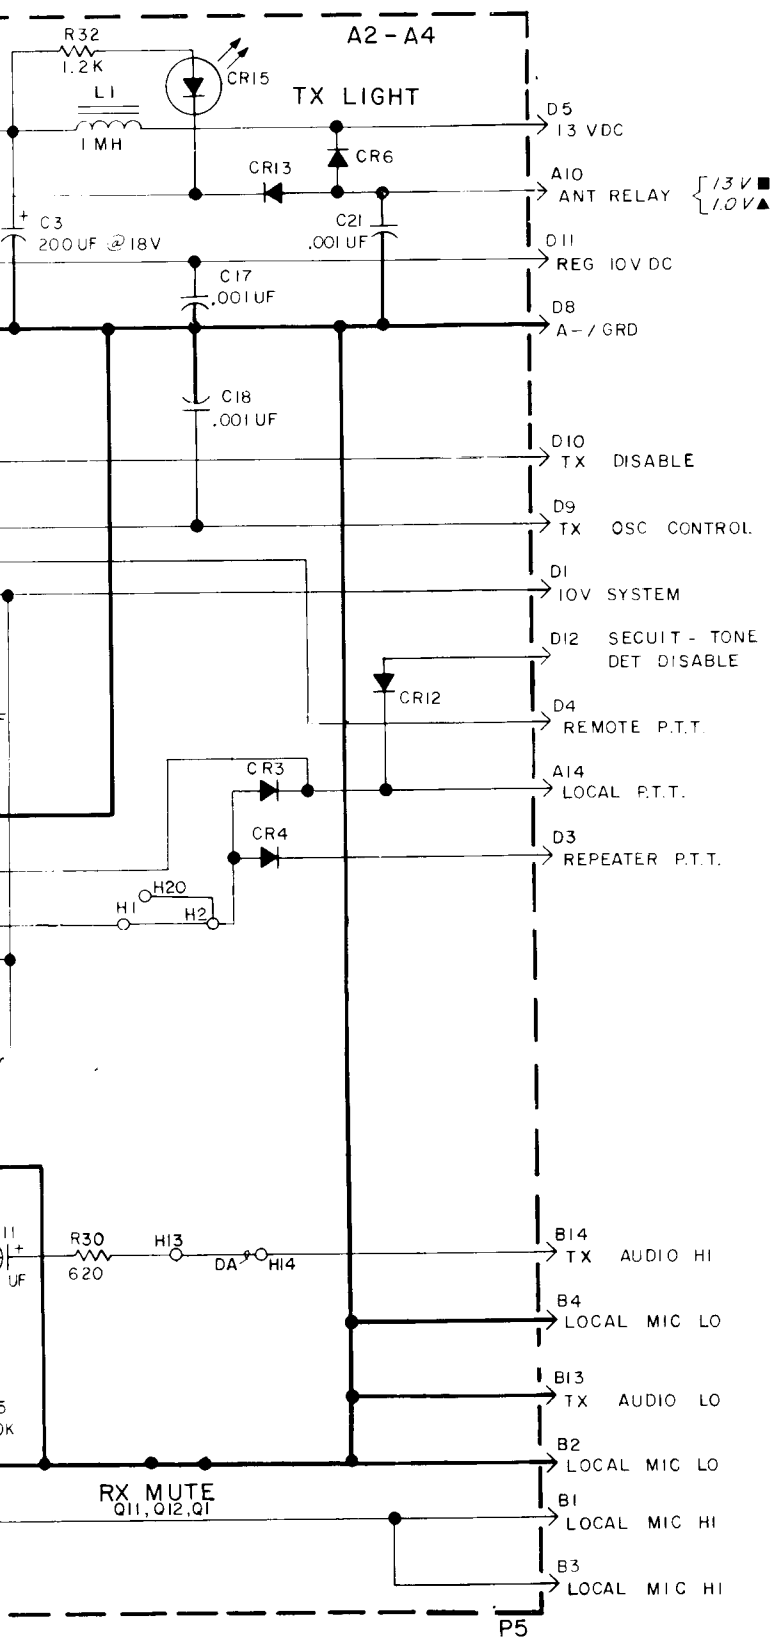

NOTES:

1. FOR 5.1 MARC V REPEATERS, JUMPERS HI-H2 AND HI3-H14 ARE PRESENT.

ALL RESISTORS ARE 1/4 WATT UNLESS OTHERWISE SPECIFIED AND RESISTOR VALUES IN OHMS UNLESS FOLLOWED BY K=1000 OHMS OR MEG=1,000,000 OHMS. CAPACITOR VALUES IN PICOFARADS (EQUAL TO MICROMICROFARADS) UNLESS FOLLOWED BY UF= MICROFARADS. INDUCTANCE VALUES IN MICROHENRYS UNLESS FOLLOWED BY MH= MILLIHENRYS OR H=HENRYS.

SEE APPLICABLE PRODUCTION CHANGE SHEETS IN INSTRUCTION BOOK SECTION DEALING WITH THIS UNIT, FOR DESCRIPTION OF CHANGES UNDER EACH REVISION LETTER.

THIS ELEM DIAG APPLIES TO

| MODEL NO | REV LETTER |
|---------------|------------|
| PL19D417252G2 | A |
| PL19D432774G2 | A |

VOLTAGE READINGS

ALL READINGS MADE WITH 20,000 OHMS-PER-VOLT METER. ALL READINGS TYPICAL.

- ▲ TRANSMITTER KEYED
- TRANSMITTER UNKEYED
- * LPTT KEYED

PARTS LIST

LB14802L

10-VOLT REGULATOR/CONTROL
19D417401G1

| SYMBOL | GE PART NO. | DESCRIPTION |
|---------------------|---------------|--|
| A1 | | PANEL 19C320809G1 |
| Q1 | 19A116375P1 | ----- TRANSISTORS ----- Silicon, PNP. |
| S1 and S2 | 19B209261P11 | ----- SWITCHES ----- Slide: (DPST, N.O., SR), 2 poles, 2 positions, 0.5 amp VDC or 3 amps VAC at 125 v; sim to Switchcraft 46204MR. |
| A2 | | REGULATOR BOARD 19D432774G1 |
| C2 and C3 | 19A115680P10 | ----- CAPACITORS ----- Electrolytic: 200 μ f +150% -10%, 18 VDCW; sim to Mallory Type TTX. |
| C4 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C5 | 19A115680P10 | Electrolytic: 200 μ f +150% -10%, 18 VDCW; sim to Mallory Type TTX. |
| C6 | 19A701534P3 | Tantalum: 0.47 μ f \pm 20%, 35 VDCW. |
| C7 | 19A143486P10 | Tantalum: 15 μ f \pm 20%, 20 VDCW. |
| C8 | 19A116080P9 | Polyester: 0.22 μ f \pm 20%, 50 VDCW. |
| C9 | 19A116080P10 | Polyester: 0.33 μ f \pm 20%, 50 VDCW. |
| C10 | 19B209233P1 | Electrolytic, non-polarized: 25 μ f \pm 20%, 25 VDCW; sim to Sprague 41D. |
| C11 | 19A701534P8 | Tantalum: 22 μ f \pm 20%, 15 VDCW. |
| C12 and C13 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C14 | 19A143486P10 | Tantalum: 15 μ f \pm 20%, 20 VDCW. |
| C15 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C16 | 19A700233P5 | Ceramic, disc: 470 pf \pm 20%, 50 VDCW. |
| C17 and C18 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C20 and C21 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C22 | 19A115680P3 | Electrolytic: 20 μ f +150% -10%, 25 VDCW; sim to Mallory Type TTX. |
| C23 | 19A143486P107 | Tantalum: 3.3 μ f \pm 10%, 15 VDCW. |
| C24 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C25 | 19A700234P7 | Polyester: 0.01 μ f \pm 10%, 50 VDCW. |
| CR1 | 19A115775P1 | ----- DIODES ----- Silicon, fast recovery, 225 mA, 50 PIV. |
| CR2 thru CR5 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| CR6 | 4037822P1 | Silicon, 1000 mA, 400 PIV. |
| CR7 thru CR12 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| CR13 | 4037822P1 | Silicon, 1000 mA, 400 PIV. |

| SYMBOL | GE PART NO. | DESCRIPTION |
|-----------------|---------------|---|
| CR15 | 19A134354P6 | Diode, optoelectronic: red; sim to Hew. Packard 5082-4655. |
| L1 | 19A115894P1 | ----- INDUCTORS ----- Audio freq: 1.0 mh ind., 0.35 ohms DC res. |
| Q1 and Q2 | 19A115910P1 | ----- TRANSISTORS ----- Silicon, NPN; sim to Type 2N3904. |
| Q3 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| Q4 | 19A115910P1 | Silicon, NPN; sim to Type 2N304. |
| Q5 | 19A115852P1 | Silicon, PNP; sim to Type 2N3906. |
| Q6 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| Q7 and Q8 | 19A116774P1 | Silicon, NPN; sim to Type 2N5210. |
| Q9 | 19A134137P1 | N Type, field effect; sim to Type 2N3458. |
| Q10 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| Q11 | 19A115852P1 | Silicon, PNP; sim to Type 2N3906. |
| Q12 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| P5 | | ----- PLUGS ----- Part of printed board 19D432788P1. |
| R1 | 19A700019P41 | ----- RESISTORS ----- Deposited carbon: 2.2K ohms \pm 5%, 1/4 w. |
| R2 | 19A700112P45 | Composition: 180 ohms \pm 5%, 1 w. |
| R3 | 3R77P240J | Composition: 24 ohms \pm 5%, 1/2 w. |
| R4 | 19B209358P101 | Variable, carbon film: approx 25 to 250 ohms \pm 10%, 0.2 w; sim to CTS Type X-201. |
| R5 | 19A700113P59 | Composition: 680 ohms \pm 5%, 1/2 w. |
| R6 | 19A700019P33 | Deposited carbon: 470 ohms \pm 5%, 1/4 w. |
| R7 | 19A143400P40 | Deposited carbon: 2K ohms \pm 5%, 1/4 w. |
| R8 | 19A700113P63 | Composition: 1K ohms \pm 5%, 1/2 w. |
| R9 | 19A700019P49 | Deposited carbon: 10K ohms \pm 5%, 1/4 w. |
| R10 | 19A143400P34 | Deposited carbon: 620 ohms \pm 5%, 1/4 w. |
| R11 | 19A700019P37 | Deposited carbon: 1K ohms \pm 5%, 1/4 w. |
| R12 | 19A700019P65 | Deposited carbon: 0.22M ohms \pm 5%, 1/4 w. |
| R13 | 19A700019P53 | Deposited carbon: 22K ohms \pm 5%, 1/4 w. |
| R14 | 19B209358P106 | Variable, carbon film: approx 300 to 10,000 ohms \pm 10%, 1/4 w; sim to CTS Type X201. |
| R15 | 19A143400P35 | Deposited carbon: 750 ohms \pm 5%, 1/4 w. |
| R16 | 19A700019P63 | Deposited carbon: 0.15M ohms \pm 5%, 1/4 w. |
| R17 | 19A700019P49 | Deposited carbon: 10K ohms \pm 5%, 1/4 w. |
| R18 | 19A700019P47 | Deposited carbon: 6.8K ohms \pm 5%, 1/4 w. |
| R19 | 19A700019P37 | Deposited carbon: 1K ohms \pm 5%, 1/4 w. |
| R20 | 19A700113P63 | Composition: 1K ohms \pm 5%, 1/2 w. |
| R21 | 19A143400P52 | Deposited carbon: 20K ohms \pm 5%, 1/4 w. |
| R22 | 19A700019P51 | Deposited carbon: 15K ohms \pm 5%, 1/4 w. |
| R23 | 19A700019P69 | Deposited carbon: 0.47 M ohms \pm 5%, 1/4 w. |
| R24 | 19A700019P60 | Deposited carbon: 82K ohms \pm 5%, 1/4 w. |
| R25 | 19A700019P67 | Deposited carbon: 0.33M ohms \pm 5%, 1/4 w. |
| R26 | 19A143400P57 | Deposited carbon: 51K ohms \pm 5%, 1/4 w. |
| R27 | 19A700019P49 | Deposited carbon: 10K ohms \pm 5%, 1/4 w. |
| R28 | 19A143400P47 | Deposited carbon: 7.5K ohms \pm 5%, 1/4 w. |
| R29 | 19A143400P54 | Deposited carbon: 30K ohms \pm 5%, 1/4 w. |
| R30 | 19A143400P34 | Deposited carbon: 620 ohms \pm 5%, 1/4 w. |

*COMPONENTS ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES

| SYMBOL | GE PART NO. | DESCRIPTION | SYMBOL | GE PART NO. | DESCRIPTION |
|-------------------|---------------|--|---------------------|---------------|---|
| R31 | 19A700019P37 | Deposited carbon: 1K ohms $\pm 5\%$, 1/4 w. | | | - - - - - DIODES AND RECTIFIERS - - - - - |
| R32 | 19A700019P38 | Deposited carbon: 1.2K ohms $\pm 5\%$, 1/4 w. | CR1* | 19A115775P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| R33 | 19A700019P23 | Deposited carbon: 68 ohms $\pm 5\%$, 1/4 w. | | 4037822P1 | In REV H & earlier: |
| R34 | 19A700019P50 | Deposited carbon: 12K ohms $\pm 5\%$, 1/4 w. | | | Silicon, 1000 mA, 400 PIV. |
| R35 | 19A143400P28 | Deposited carbon: 200 ohms $\pm 5\%$, 1/4 w. | CR2 thru CR5 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| R36 | 19A700019P31 | Deposited carbon: 330 ohms $\pm 5\%$, 1/4 w. | | 4037822P1 | Silicon, 1000 mA, 400 PIV. |
| R37 | 19A700019P21 | Deposited carbon: 56 ohms $\pm 5\%$, 1/4 w. | CR7 thru CR12 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| | | - - - - - INTEGRATED CIRCUITS - - - - - | | 4037822P1 | Silicon, 1000 mA, 400 PIV. |
| U1 | 19D416564G13 | 10-Volt regulator. | CR13 | 4037822P1 | Silicon, 1000 mA, 400 PIV. |
| | | - - - - - VOLTAGE REGULATORS - - - - - | CR15 | 19A134354P6 | Diode, optoelectronic: red; sim to Hew. Packard 5082-4655. |
| VR1 | 4036887P40 | Zener: 500 mW, 8.2 v. nominal. | | | - - - - - INDUCTORS - - - - - |
| VR2 | 4036887P4 | Zener: 500 mW, 4.4 v. nominal. | L1 | 19A115894P1 | Audio freq: 1.0 mh ind., 0.35 ohms DC res. |
| VR3 | 4036887P6 | Zener: 500 mW, 6.5 v. nominal. | | | - - - - - PLUGS - - - - - |
| A2 | | REGULATOR BOARD 19D417252G1 REV K | P5 | | (Part of printed board 19D417241P1). |
| | | - - - - - CAPACITORS - - - - - | | | - - - - - TRANSISTORS - - - - - |
| C2 and C3 | 19A115680P10 | Electrolytic: 200 μ f $\pm 150\%$ -10%, 18 VDCW; sim to Mallory Type TTX. | Q1 and Q2 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| C4 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | Q3 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| C5 | 19A115680P10 | Electrolytic: 200 μ f $\pm 150\%$ -10%, 18 VDCW; sim to Mallory Type TTX. | Q4 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| C6 | 5496267P28 | Tantalum: 0.47 μ f $\pm 20\%$, 35 VDCW; sim to Sprague Type 150D. | Q5 | 19A115768P1 | Silicon, PNP; sim to Type 2N3702. |
| | | | Q6 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| | | | Q7 and Q8 | 19A116774P1 | Silicon, NPN; sim to Type 2N5210. |
| C7 | 5496267P14 | Tantalum: 15 μ f $\pm 20\%$, 20 VDCW; sim to Sprague Type 150D. | Q9 | 19A134137P4 | N Type, field effect; sim to Type 2N3458. |
| C8 | 19A116080P9 | Polyester: 0.22 μ f $\pm 20\%$, 50 VDCW. | Q10 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| C9 | 19A116080P10 | Polyester: 0.33 μ f $\pm 20\%$, 50 VDCW. | Q11 | 19A115768P1 | Silicon, PNP; sim to Type 2N3702. |
| C10 | 19B209233P1 | Electrolytic, non-polarized: 25 μ f $\pm 20\%$, 25 VDCW; sim to Sprague 41D. | Q12 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| C11 | 5496267P10 | Tantalum: 22 μ f $\pm 20\%$, 15 VDCW; sim to Sprague Type 150D. | | | - - - - - RESISTORS - - - - - |
| C12 and C13 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R1 | 19A700019P41 | Deposited carbon: 2.2K ohms $\pm 5\%$, 1/4 w. |
| C14 | 5496267P14 | Tantalum: 15 μ f $\pm 20\%$, 20 VDCW; sim to Sprague Type 150D. | R2* | 19A700112P45 | Composition: 180 ohms $\pm 5\%$, 1 w. |
| C15 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | | 3R77P301J | In REV A & earlier: |
| C16 | 5494481P107 | Ceramic disc: 470 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R3* | 3R77P240J | Composition: 300 ohms $\pm 5\%$, 1/2 w. |
| C17 and C18 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | | 3R77P101K | Composition: 24 ohms $\pm 5\%$, 1/2 w. |
| C19* | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. Deleted by REV D. | R4 | 19B209358P101 | Earlier than REV A: |
| C20 and C21 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R5 | 19A700113P59 | Composition: 100 ohms $\pm 10\%$, 1/2 w. |
| C22 | 19A115680P3 | Electrolytic: 20 μ f $\pm 150\%$ -10%, 25 VDCW; sim to Mallory Type TTX. | R6 | 19A700019P33 | Variable, carbon film: approx 25 to 250 ohms $\pm 10\%$, 0.2 w; sim to CTS Type X-201. |
| C23 | 5496267P209 | Tantalum: 3.3 μ f $\pm 10\%$, 15 VDCW; sim to Sprague Type 150D. | R7 | 19A143400P40 | Composition: 680 ohms $\pm 5\%$, 1/2 w. |
| C24 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R8 | 3R77P102K | Deposited carbon: 470 ohms $\pm 5\%$, 1/4 w. |
| C25* | 19A116080P101 | Polyester: 0.01 μ f $\pm 10\%$, 50 VDCW. Added by REV H. | R9 | 19A700019P49 | Deposited carbon: 2K ohms $\pm 5\%$, 1/4 w. |
| | | | R10 | 19A143400P34 | Composition: 1K ohms $\pm 10\%$, 1/2 w. |
| | | | R11 | 19A700019P37 | Deposited carbon: 10K ohms $\pm 5\%$, 1/4 w. |
| | | | R12 | 19A700019P65 | Deposited carbon: 620 ohms $\pm 5\%$, 1/4 w. |
| | | | R13 | 19A700019P53 | Deposited carbon: 1K ohms $\pm 5\%$, 1/4 w. |
| | | | R14 | 19B209358P103 | Deposited carbon: 220K ohms $\pm 5\%$, 1/4 w. |
| | | | R15 | 19A143400P35 | Variable, carbon film: approx 300 to 10K ohms $\pm 10\%$, 0.25 w; sim to CTS Type X-201. |
| | | | R16 | 19A700019P63 | Deposited carbon: 750 ohms $\pm 5\%$, 1/4 w. |
| | | | R17 | 19A700019P49 | Deposited carbon: 150K ohms $\pm 5\%$, 1/4 w. |
| | | | | | Deposited carbon: 10K ohms $\pm 5\%$, 1/4 w. |

| SYMBOL | GE PART NO. | DESCRIPTION |
|---|--------------|--|
| R18 | 19A700019P47 | Deposited carbon: 6.8K ohms $\pm 5\%$, 1/4 w. |
| R19 | 19A700019P37 | Deposited carbon: 1K ohms $\pm 5\%$, 1/4 w. |
| R20 | 3R77P102K | Composition: 1K ohms $\pm 10\%$, 1/2 w. |
| R21 | 19A143400P52 | Deposited carbon: 20K ohms $\pm 5\%$, 1/4 w. |
| R22 | 19A700019P51 | Deposited carbon: 15K ohms $\pm 5\%$, 1/4 w. |
| R23 | 19A700019P69 | Deposited carbon: 470K ohms $\pm 5\%$, 1/4 w. |
| R24 | 19A700019P60 | Deposited carbon: 82K ohms $\pm 5\%$, 1/4 w. |
| R25 | 19A700019P67 | Deposited carbon: 330K ohms $\pm 5\%$, 1/4 w. |
| R26 | 19A143400P57 | Deposited carbon: 51K ohms $\pm 5\%$, 1/4 w. |
| R27 | 19A700019P49 | Deposited carbon: 10K ohms $\pm 5\%$, 1/4 w. |
| R28 | 19A143400P47 | Deposited carbon: 7.5K ohms $\pm 5\%$, 1/4 w. |
| R29 | 19A143400P54 | Deposited carbon: 30K ohms $\pm 5\%$, 1/4 w. |
| R30 | 19A143400P34 | Deposited carbon: 620 ohms $\pm 5\%$, 1/4 w. |
| R31 | 19A700019P37 | Deposited carbon: 1K ohms $\pm 5\%$, 1/4 w. |
| R32 | 19A700019P38 | Deposited carbon: 1.2K ohms $\pm 5\%$, 1/4 w. |
| R33 | 19A700019P23 | Deposited carbon: 68 ohms $\pm 5\%$, 1/4 w. |
| R34 | 19A700019P50 | Deposited carbon: 12K ohms $\pm 5\%$, 1/4 w. |
| R35 | 19A143400P28 | Deposited carbon: 200 ohms $\pm 5\%$, 1/4 w. |
| R36* | 19A700019P31 | Deposited carbon: 330 ohms $\pm 5\%$, 1/4 w. Added by REV A. |
| R37* | 19A700019P21 | Deposited carbon: 47 ohms $\pm 5\%$, 1/4 w. Added by REV J. |
| - - - - - INTEGRATED CIRCUITS - - - - - | | |
| U1* | 19D416564G4 | 10-Volt Regulator. In REV D & earlier: |
| | 19D416564G3 | 10-Volt Regulator. |
| - - - - - VOLTAGE REGULATORS - - - - - | | |
| VR1 | 4036887P40 | Zener: 500 mW, 8.2 v. nominal. |
| VR2 | 4036887P4 | Zener: 500 mW, 4.4 v. nominal. |
| VR3 | 4036887P6 | Zener: 500 mW, 6.5 v. nominal. |
| A3 | | HEAT SINK ASSEMBLY 19B226114G2 |
| - - - - - TRANSISTORS - - - - - | | |
| Q1 | 19A116758P2 | Silicon, PNP; sim to Type 2N4399. |
| - - - - - MISCELLANEOUS - - - - - | | |
| | 19B219690G1 | Handle assembly. |
| | 19A116023P1 | Insulator, plate. (Used with Q1 on A1). |
| | 19A700068P1 | Insulator, bushing. (Used with Q1 on A1). |
| | 19A701332P4 | Insulator, washer: nylon. (Used with Q3 & Q6 on A2). |
| | 7118719P10 | Clip, spring tension; sim to Prestole E-50019-003. (Used with L1 on A2). |
| | 4029974P1 | Insulator, plate. (Used with Q1 on A3). |
| | 19A121882P1 | Washer, shield. (Used with Q1 on A3). |
| | 4036994P1 | Terminal, solderless. (Used with Q1 on A3). |
| | 19B226013G1 | Heat sink. (Used with Q1 on A3). |
| | 19A121175P11 | Insulator. (Used with C10 on A2). |
| | 5491541P307 | Spacer, threaded. (Supports A3). |
| | N405P5C | Lockwasher: No. 4. (Secures S1 & S2 on A1). |
| | N80P9004C6 | Machine screw: No. 4-40 x 1/4. (Secures S1 & S2 on A1). |
| | N80P9006C6 | Machine screw: No. 4-40 x 3/8. (Secures Q1 on A1). |

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter," which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

Regulator Board 19D417252G1

REV. A - To correct moisy Regulator. Changed R3 and added R36.

REV. B - To optimize the regulator bias. Changed R2.

REV. C - To prevent local Mic audio from going to the wrong transmitter in back-to-back repeaters. Added H13, H14, H15 and D7.

REV. D - To eliminate 150 MHz oscillation in Regulator. Deleted C19.

REV. E - To prevent Regulator from sending transmit pulse during switch-off delay period. Changed V1.

REV. F - For receiver muting. Added H16 and H17.

REV. G - To correct repeater muting problem. Added H18, H19, H20 with jumper between H18 and H19.

REV. H - To stop oscillation on the 10 Volt Line. Added C25.

REV. J - To assure start-up of 10 Volt Regulator. Changed CRI and added R37.

10 Volt Regulator/Control 19D417401G1

REV. A - To add a higher gain transistor. Changed Q1.

REV. K - Deleted C1. C1 was: 19B200240P10, Tantalum: 10 μ f $\pm 5\%$, 15 VDCW.

PARTS LIST

10-VOLT REGULATOR/CONTROL
19D417401G2
ISSUE 3

| SYMBOL | GE PART NO. | DESCRIPTION |
|-------------------|--------------|--|
| A1 | | PANEL 19C320809G1 |
| Q1 | 19A116375P1 | ----- TRANSISTORS ----- Silicon, PNP. |
| S1 and S2 | 19B209261P11 | ----- SWITCHES ----- Slide: (DPST, N.O., SR), 2 poles, 2 positions, 0.5 amp VDC or 3 amps VAC at 125 v; sim to Switchcraft 46204MR. |
| A3 | | HEAT SINK ASSEMBLY 19B226114G2 |
| Q1 | 19A116758P2 | ----- TRANSISTORS ----- Silicon, PNP; sim to Type 2N4399. |
| A4 | | REGULATOR BOARD 19D432774G2 |
| C2 and C3 | 19A115680P10 | ----- CAPACITORS ----- Electrolytic: 200 μ f +150% -10%, 18 VDCW; sim to Mallory Type TTX. |
| C4 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C5 | 19A115680P10 | Electrolytic: 200 μ f +150% -10%, 18 VDCW; sim to Mallory Type TTX. |
| C7 | 19A143486P10 | Tantalum: 15 μ f \pm 20%, 20 VDCW. |
| C8 | 19A116080P9 | Polyester: 0.22 μ f \pm 20%, 50 VDCW. |
| C9 | 19A116080P10 | Polyester: 0.33 μ f \pm 20%, 50 VDCW. |
| C10 | 19B209233P1 | Electrolytic, non-polarized: 25 μ f \pm 20%, 25 VDCW; sim to Sprague 41D. |
| C11 | 19A701534P8 | Tantalum: 22 μ f \pm 20%, 15 VDCW. |
| C12 and C13 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C14 | 19A143486P10 | Tantalum: 15 μ f \pm 20%, 20 VDCW. |
| C15 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C16 | 19A700233P5 | Ceramic, disc: 470 pf \pm 20%, 50 VDCW. |
| C17 and C18 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C20 and C21 | 19A700233P7 | Ceramic, disc: 1000 pf \pm 20%, 50 VDCW. |
| C22 | 19A115680P3 | Electrolytic: 20 μ f +150% -10%, 25 VDCW; sim to Mallory Type TTX. |
| C25 | 19A700234P7 | Polyester: 0.01 μ f \pm 10%, 50 VDCW. ----- DIODES ----- |
| CR1 | 19A115775P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| CR3 and CR4 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| CR6 | 4037822P1 | Silicon, 1000 mA, 400 PIV. |
| CR7 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |

| SYMBOL | GE PART NO. | DESCRIPTION |
|----------------------|---------------|---|
| CR10 thru CR12 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. |
| CR13 | 4037822P1 | Silicon, 1000 mA, 400 PIV. |
| CR15 | 19A134354P6 | Diode, optoelectronic: red; sim to Hew. Packard 5082-4655. |
| L1 | 19A115894P1 | ----- INDUCTORS ----- Audio freq: 1.0 mh ind., 0.35 ohms DC res. |
| Q2 | 19A115910P1 | ----- TRANSISTORS ----- Silicon, NPN; sim to Type 2N3904. |
| Q3 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| Q4 | 19A115910P1 | Silicon, NPN; sim to Type 2N304. |
| Q5 | 19A115852P1 | Silicon, PNP; sim to Type 2N3906. |
| Q6 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| Q7 and Q8 | 19A116774P1 | Silicon, NPN; sim to Type 2N5210. |
| Q9 | 19A134137P4 | N Type, field effect; sim to Type 2N3458. |
| Q10 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| P5 | | ----- PLUGS ----- Part of printed board 19D432788P1. |
| R1 | 19A700019P41 | ----- RESISTORS ----- Deposited carbon: 2.2K ohms \pm 5%, 1/4 w. |
| R2 | 19A700112P45 | Composition: 180 ohms \pm 5%, 1 w. |
| R3 | 3R77P240J | Composition: 24 ohms \pm 5%, 1/2 w. |
| R4 | 19B209358P101 | Variable, carbon film: approx 25 to 250 ohms \pm 10%, 0.2 w; sim to CTS Type X-201. |
| R5 | 19A700113P59 | Composition: 680 ohms \pm 5%, 1/2 w. |
| R6 | 19A700019P33 | Deposited carbon: 470 ohms \pm 5%, 1/4 w. |
| R7 | 19A143400P40 | Deposited carbon: 2K ohms \pm 5%, 1/4 w. |
| R8 | 19A700113P63 | Composition: 1K ohms \pm 5%, 1/2 w. |
| R9 | 19A700019P49 | Deposited carbon: 10K ohms \pm 5%, 1/4 w. |
| R10 | 19A143400P34 | Deposited carbon: 620 ohms \pm 5%, 1/4 w. |
| R11 | 19A700019P37 | Deposited carbon: 1K ohms \pm 5%, 1/4 w. |
| R12 | 19A700019P65 | Deposited carbon: 0.22M ohms \pm 5%, 1/4 w. |
| R13 | 19A700019P53 | Deposited carbon: 22K ohms \pm 5%, 1/4 w. |
| R14 | 19B209358P106 | Variable, carbon film: approx 300 to 10,000 ohms \pm 10%, 1/4 w; sim to CTS Type X201. |
| R15 | 19A143400P35 | Deposited carbon: 750 ohms \pm 5%, 1/4 w. |
| R16 | 19A700019P63 | Deposited carbon: 0.15M ohms \pm 5%, 1/4 w. |
| R17 | 19A700019P49 | Deposited carbon: 10K ohms \pm 5%, 1/4 w. |
| R18 | 19A700019P47 | Deposited carbon: 6.8K ohms \pm 5%, 1/4 w. |
| R19 | 19A700019P37 | Deposited carbon: 1K ohms \pm 5%, 1/4 w. |
| R20 | 19A700113P63 | Composition: 1K ohms \pm 5%, 1/2 w. |
| R21 | 19A143400P52 | Deposited carbon: 20K ohms \pm 5%, 1/4 w. |
| R22 | 19A700019P51 | Deposited carbon: 15K ohms \pm 5%, 1/4 w. |
| R23 | 19A700019P69 | Deposited carbon: 0.47 M ohms \pm 5%, 1/4 w. |
| R24 | 19A700019P60 | Deposited carbon: 82K ohms \pm 5%, 1/4 w. |
| R25 | 19A700019P67 | Deposited carbon: 0.33M ohms \pm 5%, 1/4 w. |
| R30 | 19A143400P34 | Deposited carbon: 620 ohms \pm 5%, 1/4 w. |
| R31 | 19A700019P37 | Deposited carbon: 1K ohms \pm 5%, 1/4 w. |
| R32 | 19A700019P38 | Deposited carbon: 1.2K ohms \pm 5%, 1/4 w. |
| R33 | 19A700019P23 | Deposited carbon: 68 ohms \pm 5%, 1/4 w. |

| SYMBOL | GE PART NO. | DESCRIPTION | SYMBOL | GE PART NO. | DESCRIPTION |
|----------------|---------------|---|-----------|---------------|--|
| R36* | 19A700019P31 | Deposited carbon: 330 ohms $\pm 5\%$, 1/4 w. | P5 | | ----- PLUGS ----- (Part of printed board 19D417241P1). |
| R37 | 19A700019P21 | Deposited carbon: 56 ohms $\pm 5\%$, 1/4 w. | | | ----- TRANSISTORS ----- |
| U1 | 19D416564G13 | 10-Volt regulator. | Q2 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| VR1 | 4036887P40 | Zener: 500 mW, 8.2 v. nominal. | Q3 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| | | | Q4 | 19A115910P1 | Silicon, NPN; sim to Type 2N304. |
| | | | Q5 | 19A115768P1 | Silicon, PNP; sim to Type 2N3702. |
| | | | Q6 | 19A115300P2 | Silicon, NPN; sim to Type 2N3053. |
| VR2 | 4036887P4 | Zener: 500 mW, 4.4 v. nominal. | Q7 and Q8 | 19A116774P1 | Silicon, NPN; sim to Type 2N5210. |
| A4 | | REGULATOR BOARD 19D417252G2 REV A | Q9 | 19A134137P1 | N Type, field effect; sim to Type 2N3458. |
| C2 and C3 | 19A115680P10 | Electrolytic: 200 μ f $\pm 150\%$ -10%, 18 VDCW; sim to Mallory Type TTX. | Q10 | 19A115910P1 | Silicon, NPN; sim to Type 2N3904. |
| | | | R1 | 19A700106P71 | ----- RESISTORS ----- |
| | | | | | Composition: 2.2K ohms $\pm 5\%$, 1/4 w. |
| | | | | | Composition: 180 ohms $\pm 5\%$, 1 w. |
| | | | | | Composition: 24 ohms $\pm 5\%$, 1/2 w. |
| | | | | | Variable, carbon film: approx 25 to 250 ohms $\pm 10\%$, 0.2 w; sim to CTS Type X-201. |
| | | | | | Composition: 680 ohms $\pm 5\%$, 1/2 w. |
| | | | | | Composition: 470 ohms $\pm 5\%$, 1/4 w. |
| | | | | | Composition: 2K ohms $\pm 5\%$, 1/4 w. |
| | | | | | Composition: 1K ohms $\pm 10\%$, 1/2 w. |
| | | | | | Composition: 10K ohms $\pm 5\%$, 1/4 w. |
| C4 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R10 | 3R152P621J | Composition: 620 ohms $\pm 5\%$, 1/4 w. |
| C5 | 19A115680P10 | Electrolytic: 200 μ f $\pm 150\%$ -10%, 18 VDCW; sim to Mallory Type TTX. | R11 | 19A700106P63 | Composition: 1K ohms $\pm 5\%$, 1/4 w. |
| C7 | 5496267P14 | Tantalum: 15 μ f $\pm 20\%$, 20 VDCW; sim to Sprague Type 150D. | R12 | 3R152P224J | Composition: 220K ohms $\pm 5\%$, 1/4 w. |
| C8 | 19A116080P9 | Polyester: 0.22 μ f $\pm 20\%$, 50 VDCW. | R13 | 19A700106P95 | Composition: 22K ohms $\pm 5\%$, 1/4 w. |
| C9 | 19A116080P10 | Polyester: 0.33 μ f $\pm 20\%$, 50 VDCW. | R14 | 19B209358P106 | Variable, carbon film: approx 300 to 10,000 ohms $\pm 10\%$, 0.25 w; sim to CTS Type X-201. |
| C10 | 19B209233P1 | Electrolytic, non-polarized: 25 μ f $\pm 20\%$, 25 VDCW; sim to Sprague 41D. | R15 | 3R152P751J | Composition: 750 ohms $\pm 5\%$, 1/4 w. |
| C11 | 5496267P10 | Tantalum: 22 μ f $\pm 20\%$, 15 VDCW; sim to Sprague Type 150D. | R16 | 3R152P154J | Composition: 150K ohms $\pm 5\%$, 1/4 w. |
| C12 and C13 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R17 | 19A700106P87 | Composition: 10K ohms $\pm 5\%$, 1/4 w. |
| C14 | 5496267P14 | Tantalum: 15 μ f $\pm 20\%$, 20 VDCW; sim to Sprague Type 150D. | R18 | 19A700106P83 | Composition: 6.8K ohms $\pm 5\%$, 1/4 w. |
| C15 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R19 | 19A700106P63 | Composition: 1K ohms $\pm 5\%$, 1/4 w. |
| C16 | 5494481P107 | Ceramic disc: 470 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R20 | 3R77P102K | Composition: 1K ohms $\pm 10\%$, 1/2 w. |
| C17 and C18 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R21 | 3R152P203J | Composition: 20K ohms $\pm 5\%$, 1/4 w. |
| C20 and C21 | 5494481P111 | Ceramic disc: 1000 pf $\pm 20\%$, 1000 VDCW; sim to RMC Type JF Discap. | R22 | 19A700106P91 | Composition: 15K ohms $\pm 5\%$, 1/4 w. |
| C22 | 19A115680P3 | Electrolytic: 20 μ f $\pm 150\%$ -10%, 25 VDCW; sim to Mallory Type TTX. | R23 | 3R152P474J | Composition: 470K ohms $\pm 5\%$, 1/4 w. |
| C25 | 19A116080P101 | Polyester: 0.01 μ f $\pm 10\%$, 50 VDCW. | R24 | 19A700106P109 | Composition: 82K ohms $\pm 5\%$, 1/4 w. |
| CR1 | 19A115775P1 | Silicon, fast recovery, 225 mA, 50 PIV. | R25 | 3R152P334J | Composition: 330K ohms $\pm 5\%$, 1/4 w. |
| CR3 and CR4 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. | R30 | 3R152P621J | Composition: 620 ohms $\pm 5\%$, 1/4 w. |
| CR6 | 4037822P1 | Silicon, 1000 mA, 400 PIV. | R31 | 19A700106P63 | Composition: 1K ohms $\pm 5\%$, 1/4 w. |
| CR7 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. | R32 | 19A700106P65 | Composition: 1.2K ohms $\pm 5\%$, 1/4 w. |
| CR10 thru CR12 | 19A115250P1 | Silicon, fast recovery, 225 mA, 50 PIV. | R33 | 19A700106P35 | Composition: 68 ohms $\pm 5\%$, 1/4 w. |
| CR13 | 4037822P1 | Silicon, 1000 mA, 400 PIV. | R36 | 19A700106P51 | Composition: 330 ohms $\pm 5\%$, 1/4 w. |
| CR15 | 19A134354P6 | Diode, optoelectronic: red; sim to Hew. Packard 5082-4655. | R37 | 19A700106P31 | Composition: 47 ohms $\pm 5\%$, 1/4 w. |
| L1 | 19A115894P1 | Audio freq: 1.0 mh ind., 0.35 ohms DC res. | U1 | 19D416564G4 | ----- INTEGRATED CIRCUITS ----- 10-Volt Regulator. |
| | | ----- INDUCTORS ----- | VR1 | 4036887P40 | ----- VOLTAGE REGULATORS ----- Zener: 500 mW, 8.2 v. nominal. |
| | | | VR2 | 4036887P4 | Zener: 500 mW, 4.4 v. nominal. |

| SYMBOL | GE PART NO. | DESCRIPTION |
|--------|--------------|--|
| | | ----- MISCELLANEOUS ----- |
| | 19B219690G1 | Handle assembly. |
| | 19A116023P1 | Insulator, plate. (Used with Q1 on A1). |
| | 19A700068P1 | Insulator, bushing. (Used with Q1 on A1). |
| | 19A701332P4 | Insulator, washer: nylon. (Used with Q3 & Q6 on A4). |
| | 7118719P10 | Clip, spring tension; sim to Prestole E-50019-003. (Used with L1 on A4). |
| | 4029974P1 | Insulator, plate. (Used with Q1 on A3). |
| | 19A121882P1 | Washer, shield. (Used with Q1 on A3). |
| | 4036994P1 | Terminal, solderless. (Used with Q1 on A3). |
| | 19B226013G1 | Heat sink. (Used with Q1 on A3). |
| | 19A121175P11 | Insulator. (Used with C10 on A4). |
| | 5491541P307 | Spacer, threaded. (Supports A3). |
| | N405P5C | Lockwasher: No. 4. (Secures S1 & S2 on A1). |
| | N80P9004C6 | Machine screw: No. 4-40 x 1/4. (Secures S1 & S2 on A1). |
| | N80P9006C6 | Machine screw: No. 4-40 x 3/8. (Secures Q1 on A1). |

PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "Revision Letter," which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for descriptions of parts affected by these revisions.

Regulator Board 19D417252G2

REV. A - Deleted C1. C1 was: 19B200240P10, Tantalum: 10 µf ±5%, 15 VDCW.